

Finally, the most Reliable Undercounter is available with Pumped Drain & Tank Heat.

ET Series



Pumped Drain

Allows installation in almost all applications.

Screens

Dual screening protects both wash & drain pumps from debris.



Optional Heat

Maintains tank temperature rack after rack.



Ergonomical Design

Allows operators to load & unload with ease. Short door construction (10") keeps the aisle free and clear.

Perfect for Restaurants, Bars, and Fast Food Operations.

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over **45 years**.

www.americandish.com



American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178** **Phone (913) 422-3700** **Fax (913) 422-6630**

ET Series


MULTI-USE UNDERCOUNTER DISHWASHERS

ET... The Dishmachine of choice, when space is a concern. You will **NEVER AGAIN** have to sacrifice production or results.

- 1 1/2 HP Wash & Rinse Pump
- Reliable Tank Heat (Sustained)
- Automatic Chemical Dispensing
- Pump Drains Water (up to 20")
- Available 3" Taller Version
- 90 Second Complete Time Cycle
- Optional Chemical Alarms
- Dual Screening Catches Debris



Operate a free standing complete warewashing center in only 48" of space. To do this, combine our ET-AF Undercounter with our stainless steel table package.

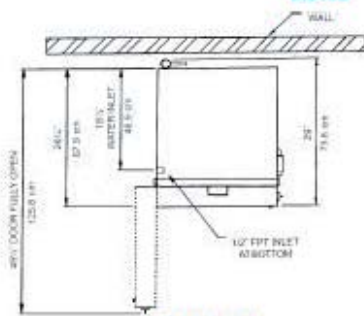

TOP VIEW


CAUTION:

Electrical and plumbing connections should be made by a qualified Service Person who will comply with all available federal, state and local health, Electrical, Plumbing, and Safety codes.


• Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.



FRONT VIEW

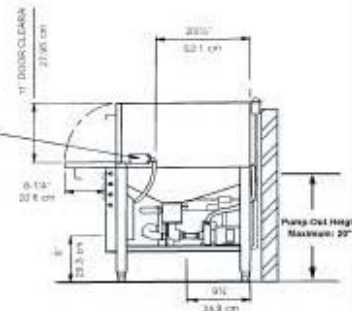

SIDE VIEW

ET Series with Pumped Drain and Heat

ET-AF

FAMILY MODELS

	ET-AF	ET-A	ET-AH
NSF RATED CAPACITY (RACKS/HOUR)	30	24	20
WASH TIME (IN SECONDS)	45	60	75
RINSE TIME (IN SECONDS)	30	45	60
DWELL (IN SECONDS)	15	15	15
TOTAL CYCLE TIME (IN SECONDS)	90	120	150

WATER TEMPERATURE OF SUPPLY WATER (NSF) **120° F. MINIMUM**
(49° CELSIUS)

WATER CONSUMPTION (NSF RATED) **1.7 GALS. PER CYCLE**
Or 6.4 liters/cycle

MOTOR RATING (Pump) (1.125 KW) **1.5 HORSEPOWER**

DRAIN MOTOR RATING..... (.037KW) **1/20 HP**

SUSTAINER HEATER..... **1/2KW**

ELECTRICAL RATING (NEC) **115 Vac, 20amp breaker, 50/60Hz, 1 phase**

Connect to Supply Source using 10-12 AWG
Copper wires using non-time delay fuse of 20
amp rating or 20 amp circuit breaker.

RACK SIZE . . . **STANDARD 19.75" X 19.75" (Or 50.2 X 50.2 cm)**

DOOR CLEARANCE* . . **11" TALL X 22.25" WIDE (Or 27.9 x 56.5 cm)**

WATER INLET **(1/2") F.P.T.**

DRAIN SIZE **3/4" I.D. Hose by 60" Long**

PUMP-OUT HEIGHT (Maximum)..... **20"**

HEIGHT OF STANDARD ET (ADJUSTER FEET WILL GIVE) **MIN: 33.5" - MAX: 34.8"**
(85.1 to 87.6 cm)

HEIGHT OF ET-AF-3 **MIN: 36.5" - MAX: 37.5"** (92.7 to 95.2 cm)

WIDTH (OVERALL) **25.5"** (64.8 cm)

DEPTH (OVERALL) **29"** (73.6 cm)

SHIPPING WEIGHT **201 POUNDS** (91.2 kg)

SHIPPING VOLUME (CRATED) **28.6 CU. FT.** (.8 cu meters)

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.