

TOP VIEW

CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.

* Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.



American Dish Service
Manufacturers of Ware Washing Equipment


WWW.AMERICANDISH.COM

ET Series Specifications

ET-AF

FAMILY MODELS
ET-AF ET-A ET-AH

NSF RATED CAPACITY (RACKS/HOUR)	30	24	20
WASH TIME (IN SECONDS)	45	60	75
RINSE TIME (IN SECONDS)	30	45	60
DWELL (IN SECONDS)	15	15	15
TOTAL CYCLE TIME (IN SECONDS)	90	120	150

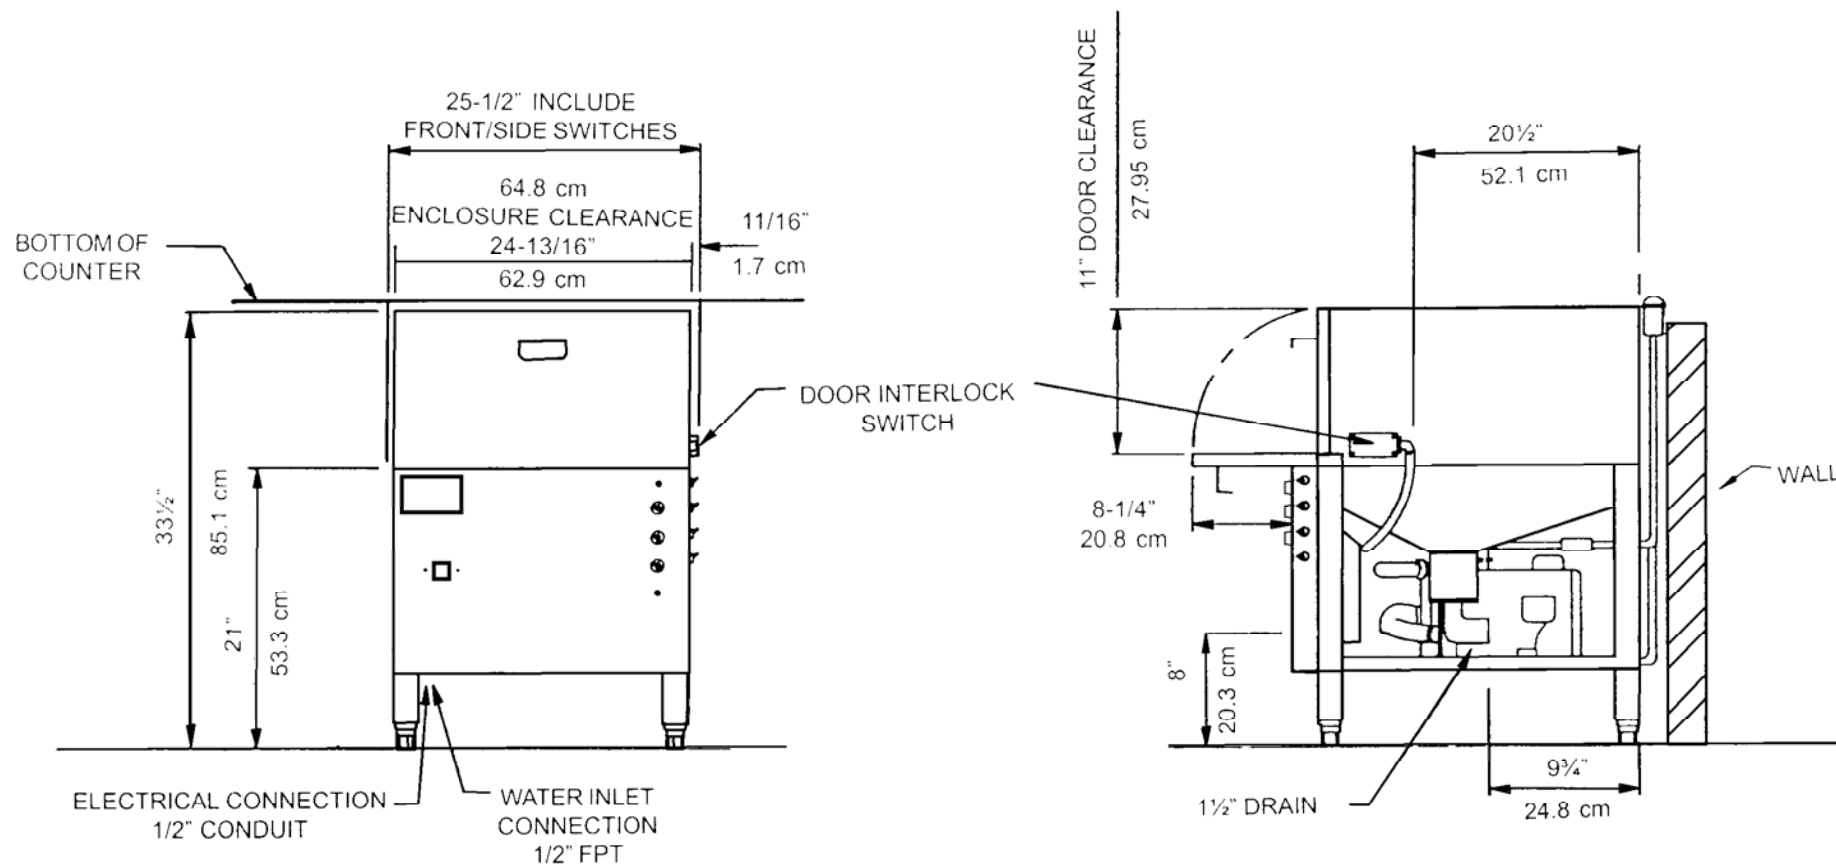

FRONT VIEW

SIDE VIEW

WATER TEMPERATURE OF SUPPLY WATER (NSF) **120° F. MINIMUM**
(49° CELSIUS)

WATER CONSUMPTION (NSF RATED) . **1.7 GALS. PER CYCLE**
Or **6.4 liters/cycle**

MOTOR RATING **(1.125 KW) 1.5 HORSEPOWER**

ELECTRICAL RATING (NEC) **115 Vac, 20amp breaker, 50/60Hz, 1 phase**

Connect to Supply Source using 10-12 AWG
Copper wires using non-time delay fuse of 20
amp rating or 20 amp circuit breaker.

RACK SIZE . . . **STANDARD 19.75" X 19.75" (Or 50.2 X 50.2 cm)**

DOOR CLEARANCE* . **11" TALL X 22.25" WIDE (Or 27.9 x 56.5 cm)**

WATER INLET **(1/2") F.P.T.**

DRAIN SIZE **(1-1/2") F.P.T.**

HEIGHT OF STANDARD ET (ADJUSTER FEET WILL GIVE) **MIN: 33.5" - MAX:34.5"**
(85.1 to 87.6 cm)

HEIGHT OF ET-AF-3 **MIN: 36.5" - MAX:37.5"** (92.7 to 95.2 cm)

WIDTH (OVERALL) **25.5"** (64.8 cm)

DEPTH (OVERALL) **29"** (73.6 cm)

SHIPPING WEIGHT **201 POUNDS** (91.2 kg)

SHIPPING VOLUME (CRATED) **28.6 CU. FT.** (.8 cu meters)

*Also available in a 3" Taller Version with
14" x 22.25" (35.8 x 57 cm) door clearance.
Model ET-AF-3